

Lok-Bolt™ Sleeve Expansion Anchor

PRODUCT DESCRIPTION

The Lok-Bolt is a pre-assembled single unit sleeve anchor available in carbon steel and stainless steel which can be used in concrete, block, brick, and stone. The Lok-Bolt is designed to draw the fixture into full bearing against the base material through the action of its unique and flexible compression ring. This helps to increase the resistance of the anchor to loosening when subjected to vibratory loads. As the anchor is being tightened, the nylon compression ring will compress if necessary, so that the fixture is tightly secured against the face of the base material. Under load, the specially tapered plow bolt is drawn further into the expansion sleeve to develop increased locking action against the walls of the hole. Extension sleeves are added for longer lengths.

GENERAL APPLICATIONS AND USES

- Door and Window Frame Installations
- Mounting fixtures on walls
- Mounting of Handrails and Fencing
- Shelving and Storage
- Masonry Applications
- Electrical and Mechanical Attachments

FEATURES AND BENEFITS

- Multiple head styles for multiple applications and finished appearance
- Fits standard fixture holes – No need to undersize anchors for proper fit
- Immediate Loading – Minimizes downtime
- Sleeve has 360° contact area and reduces concrete stress
- Versatile and ideal for concrete, brick and block
- Available in carbon steel and Type 304 stainless steel


APPROVALS AND LISTINGS

Southern Building Code Conference International (SBCCI) #9944A
 Florida Building Code Approval – FL2209.3
 Miami-Dade County Notice of Acceptance (NOA) 03-0311.08
 Factory Mutual Research Corporation (FM Approvals) Serial No. 26692, J.I. OJ8A1.AH, J.I. OJ9A9.AH
 Underwriters Laboratory (UL Listed) File No. EX 1289 (N)
 Meets the descriptive requirements of FF-S.235C, Group II, Type 3, Class 3 (superceded)

GUIDE SPECIFICATIONS

CSI Divisions: 03151-Concrete Anchoring, 04081-Masonry Anchorage and 05090-Metal Fastenings. Sleeve Anchors shall be Lok-Bolt anchors as supplied by Powers Fasteners, Inc., Brewster, NY.

SECTION CONTENTS	Page No.
General Information.....	55
Installation Specifications.....	56
Material Specifications.....	56
Performance Data.....	57
Design Criteria.....	59
Ordering Information.....	62

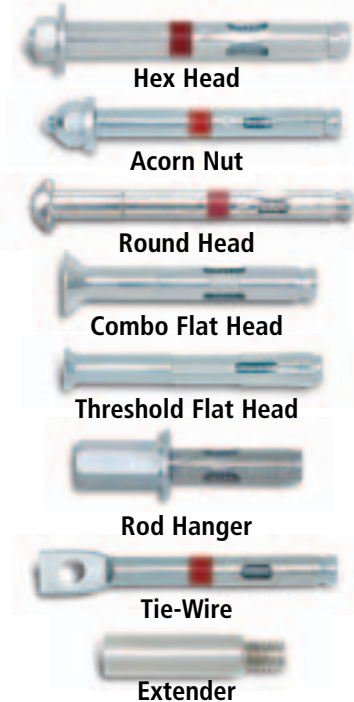

HEAD STYLES

- Hex Head
- Acorn Nut
- Round Head
- Combo Flat Head
- Threshold Flat Head
- Rod Hanger
- Tie-Wire

ANCHOR MATERIALS

- Zinc Plated Carbon Steel
- Type 304 Stainless Steel

ANCHOR SIZE RANGE (TYP.)

- 1/4" diameter x 5/8" length to
- 3/4" diameter x 7 1/2" length

SUITABLE BASE MATERIALS

- Normal-Weight Concrete
- Structural Lightweight Concrete
- Grouted Concrete Masonry
- Hollow Concrete Masonry

INSTALLATION SPECIFICATIONS

Acorn Nut and Hex Head Lok-Bolt

Dimension	Anchor Size, <i>d</i>					
	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"
ANSI Drill Bit Size, <i>d_{bit}</i> (in.)	1/4	5/16	3/8	1/2	5/8	3/4
Fixture Clearance Hole, <i>d_h</i> (in.)	5/16	3/8	7/16	9/16	11/16	15/16
Plow Bolt Size (UNC)	10-24	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11
Nut Height (in.)	3/16	7/32	17/64	21/64	7/16	35/64
Washer O.D., <i>d_w</i> (in.)	1/2	5/8	13/16	1	1 3/8	1 3/4
Wrench Size (in.)	3/8	7/16	1/2	9/16	3/4	15/16

Round Head Lok-Bolt

Dimension	Anchor Size, <i>d</i>		
	1/4"	5/16"	3/8"
ANSI Drill Bit Size, <i>d_{bit}</i> (in.)	1/4	5/16	3/8
Fixture Clearance Hole, <i>d_h</i> (in.)	5/16	3/8	7/16
Plow Bolt Size (UNC)	10-24	1/4-20	5/16-18
Head Height (in.)	11/64	13/64	15/64
Head Width, <i>d_{hd}</i> (in.)	29/64	9/16	43/64

Combo Flat Head Lok-Bolt

Dimension	Anchor Size, <i>d</i>		
	1/4"	5/16"	3/8"
ANSI Drill Bit Size, <i>d_{bit}</i> (in.)	1/4	5/16	3/8
Fixture Clearance Hole, <i>d_h</i> (in.)	5/16	3/8	7/16
Plow Bolt Size (UNC)	10-24	1/4-20	5/16-18
Head Height (in.)	5/32	3/16	15/64
Head Width, <i>d_{hd}</i> (in.)	1/2	5/8	3/4

Rod Hanger Lok-Bolt

Dimension	Anchor Size, <i>d</i>		
	1/4"	3/8"	1/2"
ANSI Drill Bit Size, <i>d_{bit}</i> (in.)	1/4	3/8	1/2
Plow Bolt Size (UNC)	1/4-20	5/16-18	3/8-16
Coupling Height (in.)	7/8	1	1 1/4
Washer O.D., <i>d_w</i> (in.)	5/8	13/16	1
Coupling Wrench Size (in.)	7/16	1/2	11/16

Threshold Lok-Bolt


Dimension	Anchor Size, <i>d</i>
	1/4"
ANSI Drill Bit Size, <i>d_{bit}</i> (in.)	1/4
Fixture Clearance Hole, <i>d_h</i> (in.)	5/16
Plow Bolt Size (UNC)	10-24
Head Height (in.)	5/64
Head Width, <i>d_{hd}</i> (in.)	23/64

Tire-Wire Lok-Bolt


Dimension	Anchor Size, <i>d</i>
	5/16"
ANSI Drill Bit Size, <i>d_{bit}</i> (in.)	5/16
Fixture Clearance Hole, <i>d_h</i> (in.)	1/4
Plow Bolt Size (UNC)	1/4-20
Head Height (in.)	1 9/16
Head Width, <i>d_{hd}</i> (in.)	31/64

Installation Guidelines


Using the proper diameter bit, drill a hole into the base material to a depth of at least 1/2" or one anchor diameter deeper than the embedment required. The tolerances of the drill bit used should meet the requirements of ANSI Standard B212.15.



Blow the hole clean of dust and other material. Do not expand the anchor prior to installation.



Drive the anchor through the fixture into the anchor hole until the head is firmly seated against the fixture. Be sure the anchor is driven to the required embedment depth.



Tighten the anchor by turning the nut of head 3 to 5 turns past finger tight or by applying the guide installation torque from the finger tight position.



MATERIAL SPECIFICATIONS

General Lok-Bolt Components

Anchor Component	Component Material	
	Carbon Steel	Stainless Steel
Plow Bolt	AISI 1010 / 1018	Type 18-8 SS
Expansion Sleeve	AISI 1010 / 1020	Type 304 SS
Extension Sleeve	AISI 1010 / 1020	Type 304 SS
Compression Ring	Nylon	Nylon
Zinc Plating	ASTM B633, SC1, Type III (Fe/Zn 5)	N/A

Lok-Bolt Head Components

Anchor Component	Component Material	
	Carbon Steel	Stainless Steel
Hex Nut	ASTM A 563, Grade A	Type 304 SS
Acorn Nut	AISI 1010 / 1018	Type 304 SS
Washer	ASTM F 844	Type 18-8 SS
Round Head	AISI 1010 / 1018	Type 304 SS
Flat Head	AISI 1010 / 1018	Type 304 SS
Rod Coupling	AISI 12L14	Type 18-8 SS
Threshold	AISI 1010 / 1018	N/A
Tie-Wire	AISI 1010 / 1018	N/A
Zinc Plating	ASTM B 633, SC1, Type III (Fe/Zn 5)	N/A

PERFORMANCE DATA

Ultimate Load Capacities for Carbon and Stainless Steel Lok-Bolt in Normal-Weight Concrete^{1,2}

Anchor Diameter <i>d</i> in. (mm)	Minimum Embed. Depth <i>h_v</i> in. (mm)	Maximum Tightening Torque <i>T_{max}</i> ft.-lbs.		Minimum Concrete Compressive Strength (<i>f'_c</i>)					
				2,000 psi (13.8 MPa)		4,000 psi (27.6 MPa)		6,000 psi (41.4 MPa)	
				Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	5/8 (15.9)	3-4	2-3	540 (2.4)	1,000 (4.5)	620 (2.8)	1,200 (5.4)	680 (3.1)	1,200 (5.4)
	1 1/8 (28.6)			1,190 (5.3)	1,520 (6.8)	1,340 (6.0)	1,520 (6.8)	1,730 (7.8)	1,520 (6.8)
5/16 (7.9)	1 1/2 (38.1)	6-8	—	2,070 (9.4)	1,520 (6.8)	2,080 (9.4)	1,520 (6.8)	2,070 (9.3)	1,520 (6.8)
3/8 (9.5)	1 5/8 (41.3)	12-16	8-11	2,450 (11.1)	2,440 (11.0)	2,680 (12.1)	2,440 (11.0)	2,700 (12.2)	2,440 (11.0)
1/2 (12.7)	2 1/4 (57.2)	20-28	15-20	4,770 (21.5)	4,210 (19.0)	5,015 (22.6)	4,220 (19.0)	5,275 (23.7)	4,210 (19.0)
5/8 (15.9)	2 1/4 (57.2)	45-60	30-40	3,270 (14.7)	7,200 (32.4)	5,860 (26.4)	7,200 (32.4)	6,250 (28.1)	7,200 (32.4)
	2 3/4 (69.9)			6,060 (27.3)	7,820 (35.2)	6,620 (29.8)	7,820 (35.2)	6,800 (30.6)	7,810 (35.2)
3/4 (19.1)	2 1/4 (57.2)	70-90	45-60	4,480 (20.2)	9,840 (44.3)	8,420 (37.9)	11,670 (52.5)	8,940 (40.2)	11,670 (52.5)
	3 3/8 (85.7)			6,790 (30.6)	12,600 (56.7)	8,720 (39.2)	12,600 (56.7)	8,940 (40.2)	12,600 (56.7)

- The values listed above are ultimate load capacities which should be reduced by a minimum safety factor of 4.0 or greater to determine the allowable working load.
- Linear interpolation may be used to determine allowable loads for intermediate embedments and compressive strengths.

Allowable Load Capacities for Carbon and Stainless Steel Lok-Bolt in Normal-Weight Concrete^{1,2}

Anchor Diameter <i>d</i> in. (mm)	Minimum Embed. Depth <i>h_v</i> in. (mm)	Maximum Tightening Torque <i>T_{max}</i> ft.-lbs.		Minimum Concrete Compressive Strength (<i>f'_c</i>)					
				2,000 psi (13.8 MPa)		4,000 psi (27.6 MPa)		6,000 psi (41.4 MPa)	
				Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	5/8 (15.9)	3-4	2-3	135 (0.6)	250 (1.1)	155 (0.7)	300 (1.4)	170 (0.8)	300 (1.4)
	1 1/8 (28.6)			255 (1.1)	380 (1.7)	335 (1.5)	380 (1.7)	435 (1.9)	380 (1.7)
5/16 (7.9)	1 1/2 (38.1)	6-8	—	520 (2.3)	380 (1.7)	520 (2.3)	380 (1.7)	520 (2.3)	380 (1.7)
3/8 (9.5)	1 5/8 (41.3)	12-16	8-11	615 (2.8)	610 (2.7)	670 (3.0)	610 (2.7)	675 (3.0)	610 (2.7)
1/2 (12.7)	2 1/4 (57.2)	20-28	15-20	1,195 (5.4)	1,055 (4.7)	1,255 (5.6)	1,055 (4.7)	1,320 (5.9)	1,055 (4.7)
5/8 (15.9)	2 1/4 (57.2)	45-60	30-40	818 (3.7)	1,800 (8.1)	1,465 (6.6)	1,800 (8.1)	1,565 (7.0)	1,800 (8.1)
	2 3/4 (69.9)			1,515 (6.8)	1,955 (8.8)	1,655 (7.4)	1,955 (8.8)	1,700 (7.7)	1,955 (8.8)
3/4 (19.1)	2 1/4 (57.2)	70-90	40-60	1,120 (5.0)	2,460 (11.1)	2,105 (9.5)	2,918 (13.1)	2,235 (10.1)	2,920 (13.1)
	3 3/8 (85.7)			1,700 (7.7)	3,150 (14.2)	2,180 (9.8)	3,150 (14.2)	2,235 (10.1)	3,150 (14.2)

- Allowable load capacities listed are calculated using an applied safety factor of 4.0.
- Linear interpolation may be used to determine allowable loads for intermediate embedments and compressive strengths.

PERFORMANCE DATA

Ultimate and Allowable Load Capacities for Carbon and Stainless Steel Lok-Bolt in Structural Lightweight Concrete^{1,2,3}

Anchor Dia. <i>d</i> in. (mm)	Min. Embed. Depth <i>h_v</i> in. (mm)	Maximum Tightening Torque <i>T_{max}</i> ft.-lbs.	Minimum Concrete Compressive Strength							
			<i>f'_c</i> = 3,000 psi (20.7 MPa)				<i>f'_c</i> = 5,000 psi (34.5 MPa)			
			Ultimate Load		Allowable Load		Ultimate Load		Allowable Load	
			Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	1/4 (6.4)	2-3	1,040 (4.7)	1,160 (5.2)	260 (1.2)	290 (1.3)	1,240 (5.6)	1,160 (5.2)	310 (1.4)	290 (1.3)
5/16 (7.9)	5/16 (7.9)	5-6	1,140 (5.1)	1,560 (7.0)	285 (1.3)	390 (1.8)	1,720 (7.7)	1,560 (7.0)	430 (1.9)	390 (1.8)
3/8 (9.5)	3/8 (9.5)	8-11	1,180 (5.3)	2,600 (11.7)	295 (1.3)	650 (2.9)	1,720 (7.7)	2,600 (11.7)	430 (1.9)	650 (2.9)
1/2 (12.7)	1/2 (12.7)	15-20	2,400 (10.8)	4,020 (18.1)	600 (2.7)	1,005 (4.5)	3,780 (17.0)	4,020 (18.1)	945 (4.3)	1,005 (4.5)
5/8 (15.9)	5/8 (15.9)	30-40	3,740 (16.8)	6,420 (28.9)	935 (4.2)	1,605 (7.2)	4,640 (20.9)	6,420 (28.9)	1,160 (5.2)	1,605 (7.2)
3/4 (19.1)	3/4 (19.1)	45-60	3,740 (16.8)	10,440 (47.0)	935 (4.2)	2,610 (11.7)	4,640 (20.9)	10,440 (47.0)	1,160 (5.2)	2,610 (11.7)

1. The values listed above are ultimate and allowable load capacities for anchors in sand-lightweight concrete.
2. Allowable load capacities are calculated using an applied safety factor of 4.0.
3. Linear interpolation may be used to determine ultimate loads for intermediate compressive strengths.

Ultimate and Allowable Load Capacities for Carbon and Stainless Steel Lok-Bolt Installed Through Metal Deck into Structural Lightweight Concrete^{1,2,3,4}

Anchor Dia. <i>d</i> in. (mm)	Min. Embed. Depth <i>h_v</i> in. (mm)	Maximum Tightening Torque <i>T_{max}</i> ft.-lbs.	Lightweight Concrete Over Minimum 20 Ga. Metal Deck <i>f'_c</i> ≥ 3,000 (20.7 MPa)							
			Minimum 1-1/2" Wide Deck				Minimum 4-1/2" Wide Deck			
			Ultimate Load		Allowable Load		Ultimate Load		Allowable Load	
			Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	1 1/4 (31.8)	2-3	1,080 (4.9)	1,920 (8.6)	270 (1.2)	480 (2.2)	1,080 (4.9)	1,920 (8.6)	270 (1.2)	480 (2.2)
5/16 (7.9)	1 1/2 (38.1)	5-6	1,080 (4.9)	1,920 (8.6)	270 (1.2)	480 (2.2)	1,080 (4.9)	1,920 (8.6)	270 (1.2)	480 (2.2)
3/8 (9.5)	2 (50.8)	8-11	1,080 (4.9)	2,480 (11.2)	270 (1.2)	620 (2.8)	1,080 (4.9)	1,920 (8.6)	270 (1.2)	480 (2.2)
1/2 (12.7)	2 1/2 (63.5)	15-20	1,940 (8.7)	2,480 (11.2)	485 (2.2)	620 (2.8)	2,840 (12.8)	4,640 (20.9)	710 (3.2)	1,160 (5.2)
5/8 (15.9)	2 3/4 (69.9)	30-40	-	-	-	-	2,840 (12.8)	4,640 (20.9)	710 (3.2)	1,160 (5.2)
3/4 (19.1)	3 (76.2)	45-60	-	-	-	-	4,440 (20.0)	9,060 (40.8)	1,110 (5.0)	2,265 (10.2)

1. The values listed above are ultimate and allowable load capacities for anchors in sand-lightweight concrete over metal deck.
2. Allowable loads capacities are calculated using an applied safety factor of 4.0.
3. Tabulated load values are for anchors installed in the center of the flute. Spacing distances shall be in accordance with the spacing lightweight concrete table listed in the Design Criteria section.
4. Anchors are permitted to be installed in the lower or upper flute of the metal deck provided the proper installed procedures are maintained.

PERFORMANCE DATA

Ultimate and Allowable Load Capacities for Lok-Bolt in Hollow or Solid Concrete Masonry^{1,2,3,4,5}

1. Tabulated load values are for carbon and stainless steel anchors installed in minimum 6-inch wide, Grade N, Type II, medium and normal-weight concrete masonry units. Mortar must be minimum Type N. Masonry prism compressive strength must be 1,500 psi minimum at the time of installation.
2. Allowable loads are for carbon and stainless steel anchors and are based on average ultimate values using a safety factor of 5.0.
3. Linear interpolation may be used for allowable loads for intermediate embedment depths.
4. The tabulated values are for anchors installed at a minimum of 12 anchor diameters on center for 100 percent capacity. Spacing distances may be reduced to 6 anchor diameters on center provided the capacities are reduced by 50 percent. Linear interpolation may be used for intermediate spacings.
5. Anchors with diameters of 1/2" and larger installed in hollow concrete masonry units are limited to one anchor per unit cell.

Anchor Dia. <i>d</i> in. (mm)	Min. Embed. Depth <i>h_v</i> in. (mm)	Maximum Tightening Torque <i>T_{max}</i> ft.-lbs.	Min. Edge Dist. in. (mm)	Min. End Dist. in. (mm)	<i>f'_m</i> ≥ 1,500 psi (10.4 MPa)			
					Ultimate Load		Allowable Load	
					Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	5/8 (15.9)	1-3	3 3/4 (95.3)	3 3/4 (95.3)	230 (1.0)	1,000 (4.5)	45 (0.2)	200 (0.9)
	1 1/8 (28.6)		3 3/4 (95.3)	8 (203.2)	1,200 (5.4)	1,270 (5.7)	240 (1.1)	255 (1.1)
5/16 (7.9)	1 1/2 (38.1)	4-6	3 3/4 (95.3)	8 (203.2)	1,430 (6.4)	1,970 (8.9)	285 (1.3)	395 (1.8)
3/8 (9.5)	1 1/2 (38.1)	8-11	12 (304.8)	12 (304.8)	1,700 (7.7)	2,180 (9.8)	340 (1.5)	435 (2.0)
1/2 (12.7)	1 1/2 (38.1)	16-20	12 (304.8)	12 (304.8)	2,460 (11.1)	2,840 (12.8)	490 (2.2)	570 (2.6)



Ultimate and Allowable Load Capacities for Lok-Bolt in Hollow or Solid Clay Brick Masonry^{1,2,3}

1. Tabulated load values are for carbon and stainless steel anchors installed in Grade SW multiple wythe, solid brick masonry conforming to ASTM C62.
2. Allowable loads are calculated using an applied safety factor of 5.0.
3. The tabulated values are for anchors installed at a minimum of 12 anchor diameters on center for 100 percent capacity. Spacing distances may be reduced to 6 anchor diameters on center provided the capacities are reduced by 50 percent. Linear interpolation may be used for intermediate spacings.

Anchor Dia. <i>d</i> in. (mm)	Min. Embed. Depth <i>h_v</i> in. (mm)	Maximum Tightening Torque <i>T_{max}</i> ft.-lbs.	Min. Edge Dist. in. (mm)	Min. End Dist. in. (mm)	<i>f'_m</i> ≥ 1,500 psi (10.4 MPa)			
					Ultimate Load		Allowable Load	
					Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	5/8 (15.9)	1-3	4 (101.6)	4 (101.6)	800 (3.6)	1,120 (5.0)	160 (0.7)	225 (1.0)
	1 1/8 (28.6)				1-3	950 (4.3)	1,120 (5.0)	190 (0.9)
5/16 (7.9)	1 1/2 (38.1)	4-6	8 (203.2)	8 (203.2)	1,230 (5.5)	1,120 (5.0)	245 (1.1)	225 (1.0)
3/8 (9.5)	1 1/2 (38.1)	8-11			1,860 (8.4)	1,260 (5.7)	370 (1.7)	250 (1.1)
1/2 (12.7)	1 1/2 (38.1)	16-20			3,520 (15.8)	4,010 (18.0)	705 (3.2)	800 (3.6)

DESIGN CRITERIA

Combined Loading

For anchors loaded in both shear and tension, the combination of loads should be proportioned as follows:

$$\left(\frac{N_u}{N_n}\right)^{\frac{5}{3}} + \left(\frac{V_u}{V_n}\right)^{\frac{5}{3}} \leq 1 \quad \text{OR} \quad \left(\frac{N_u}{N_n}\right) + \left(\frac{V_u}{V_n}\right) \leq 1$$

Where: *N_u* = Applied Service Tension Load
N_n = Allowable Tension Load
V_u = Applied Service Shear Load
V_n = Allowable Shear Load

Load Adjustment Factors for Spacing and Edge Distances

Anchor Installed in Normal-Weight Concrete					
Anchor Dimension	Load Type	Critical Distance (Full Anchor Capacity)	Critical Load Factor	Minimum Distance (Reduced Capacity)	Minimum Load Factor
Spacing (<i>s</i>)	Tension and Shear	<i>s_{cr}</i> = 3.0 <i>h_v</i>	<i>F_N</i> = <i>F_V</i> = 1.0	<i>s_{min}</i> = 1.5 <i>h_v</i>	<i>F_N</i> = <i>F_V</i> = 0.50
Edge Distance (<i>c</i>)	Tension	<i>c_{cr}</i> = 12 <i>d</i>	<i>F_N</i> = 1.0	<i>c_{min}</i> = 5 <i>d</i>	<i>F_N</i> = 0.70
	Shear	<i>c_{cr}</i> = 12 <i>d</i>	<i>F_V</i> = 1.0	<i>c_{min}</i> = 5 <i>d</i>	<i>F_V</i> = 0.45


Anchor Installed in Lightweight Concrete					
Anchor Dimension	Load Type	Critical Distance (Full Anchor Capacity)	Critical Load Factor	Minimum Distance (Reduced Capacity)	Minimum Load Factor
Spacing (<i>s</i>)	Tension and Shear	<i>s_{cr}</i> = 3.0 <i>h_v</i>	<i>F_N</i> = <i>F_V</i> = 1.0	<i>s_{min}</i> = 1.5 <i>h_v</i>	<i>F_N</i> = <i>F_V</i> = 0.50
Edge Distance (<i>c</i>)	Tension	<i>c_{cr}</i> = 12 <i>d</i>	<i>F_N</i> = 1.0	<i>c_{min}</i> = 5 <i>d</i>	<i>F_N</i> = 0.85
	Shear	<i>c_{cr}</i> = 12 <i>d</i>	<i>F_V</i> = 1.0	<i>c_{min}</i> = 5 <i>d</i>	<i>F_V</i> = 0.40

DESIGN CRITERIA

Load Adjustment Factors for Normal-Weight Concrete


Spacing, Tension (F_N) & Shear (F_V)							
Dia. (in.)	1/4	5/16	3/8	1/2	5/8	3/4	
h_V (in.)	1 1/4	1 1/2	2	2 1/2	2 3/4	3	
s_{cr} (in.)	3 3/4	4 1/2	6	7 1/2	8 1/4	9	
s_{min} (in.)	1 7/8	2 1/4	3	3 3/4	4 1/8	4 1/2	
Spacing, s (inches)	1 7/8	0.50					
	2 1/4	0.56	0.50				
	3	0.80	0.67	0.50			
	3 3/4	1.00	0.83	0.63	0.50		
	4		0.89	0.67	0.53		
	4 1/8		0.92	0.69	0.55	0.50	
	4 1/2		1.00	0.75	0.60	0.55	0.50
	6			1.00	0.80	0.73	0.67
	7 1/2				1.00	0.91	0.83
	8 1/4					1.00	0.92
9						1.00	

Notes: For anchors loaded in tension and shear, the critical spacing (s_{cr}) is equal to 3 embedment depths ($3h_V$) at which the anchor achieves 100% of load. Minimum spacing (s_{min}) is equal to 1.5 embedment depths ($1.5h_V$) at which the anchor achieves 50% of load.




Edge Distance, Tension (F_N)							
Dia. (in.)	1/4	5/16	3/8	1/2	5/8	3/4	
c_{cr} (in.)	3	3 3/4	4 1/2	6	7 1/2	9	
c_{min} (in.)	1 1/4	1 5/8	1 7/8	2 1/2	3 1/8	3 3/4	
Edge Distance, c (inches)	1 1/4	0.70					
	1 5/8	0.76	0.70				
	1 7/8	0.81	0.74	0.70			
	2 1/2	0.91	0.83	0.77	0.70		
	3	1.00	0.90	0.83	0.74		
	3 1/8		0.91	0.84	0.75	0.70	
	3 3/4		1.00	0.91	0.81	0.74	0.70
	4 1/2			1.00	0.87	0.79	0.74
	6				1.00	0.90	0.81
	7 1/2					1.00	0.84
9						1.00	

Notes: For anchors loaded in tension, the critical edge distance (c_{cr}) is equal to 12 anchor diameters ($12d$) at which the anchor achieves 100% of load. Minimum edge distance (c_{min}) is equal to 5 anchor diameters ($5d$) at which the anchor achieves 70% of load.



Edge Distance, Shear (F_V)							
Dia. (in.)	1/4	5/16	3/8	1/2	5/8	3/4	
c_{cr} (in.)	3	3 3/4	4 1/2	6	7 1/2	9	
c_{min} (in.)	1 1/4	1 5/8	1 7/8	2 1/2	3 1/8	3 3/4	
Edge Distance, c (inches)	1 1/4	0.45					
	1 5/8	0.57	0.45				
	1 7/8	0.65	0.53	0.45			
	2 1/2	0.84	0.69	0.58	0.45		
	3	1.00	0.81	0.69	0.53		
	3 1/8		0.84	0.71	0.55	0.45	
	3 3/4		1.00	0.84	0.65	0.53	0.45
	4 1/2			1.00	0.76	0.62	0.53
	6				1.00	0.81	0.69
	7 1/2					1.00	0.84
9						1.00	

Notes: For anchors loaded in shear, the critical edge distance (c_{cr}) is equal to 12 anchor diameters ($12d$) at which the anchor achieves 100% of load. Minimum edge distance (c_{min}) is equal to 5 anchor diameters ($5d$) at which the anchor achieves 45% of load.




DESIGN CRITERIA

Load Adjustment Factors for Lightweight Concrete


Spacing, Tension (F_N) & Shear (F_V)							
Dia. (in.)	1/4	5/16	3/8	1/2	5/8	3/4	
h_v (in.)	1 1/4	1 1/2	2	2 1/2	2 3/4	3	
s_{cr} (in.)	3 3/4	4 1/2	6	7 1/2	8 1/4	9	
s_{min} (in.)	1 7/8	2 1/4	3	3 3/4	4 1/8	4 1/2	
Spacing, s (inches)	1 7/8	0.50					
	2 1/4	0.56	0.50				
	3	0.80	0.67	0.50			
	3 3/4	1.00	0.83	0.63	0.50		
	4		0.89	0.67	0.53		
	4 1/8		0.92	0.69	0.55	0.50	
	4 1/2		1.00	0.75	0.60	0.55	0.50
	6			1.00	0.80	0.73	0.67
	7 1/2				1.00	0.91	0.83
8 1/4					1.00	0.92	
9						1.00	

Notes: For anchors loaded in tension and shear, the critical spacing (s_{cr}) is equal to 3 embedment depths ($3h_v$) at which the anchor achieves 100% of load. Minimum spacing (s_{min}) is equal to 1.5 embedment depths ($1.5h_v$) at which the anchor achieves 50% of load.




Edge Distance, Tension (F_N)							
Dia. (in.)	1/4	5/16	3/8	1/2	5/8	3/4	
c_{cr} (in.)	3	3 3/4	4 1/2	6	7 1/2	9	
c_{min} (in.)	1 1/4	1 5/8	1 7/8	2 1/2	3 1/8	3 3/4	
Edge Distance, c (inches)	1 1/4	0.85					
	1 5/8	0.88	0.85				
	1 7/8	0.90	0.87	0.85			
	2 1/2	0.96	0.91	0.89	0.85		
	3	1.00	0.95	0.91	0.87		
	3 1/8		0.96	0.92	0.88	0.85	
	3 3/4		1.00	0.96	0.90	0.87	0.85
	4 1/2			1.00	0.94	0.90	0.87
	6				1.00	0.95	0.91
7 1/2					1.00	0.92	
9						1.00	

Notes: For anchors loaded in tension, the critical edge distance (c_{cr}) is equal to 12 anchor diameters ($12d$) at which the anchor achieves 100% of load. Minimum edge distance (c_{min}) is equal to 5 anchor diameters ($5d$) at which the anchor achieves 85% of load.



Edge Distance, Shear (F_V)							
Dia. (in.)	1/4	5/16	3/8	1/2	5/8	3/4	
c_{cr} (in.)	3	3 3/4	4 1/2	6	7 1/2	9	
c_{min} (in.)	1 1/4	1 5/8	1 7/8	2 1/2	3 1/8	3 3/4	
Edge Distance, c (inches)	1 1/4	0.40					
	1 5/8	0.53	0.40				
	1 7/8	0.61	0.49	0.40			
	2 1/2	0.83	0.66	0.54	0.40		
	3	1.00	0.79	0.66	0.49		
	3 1/8		0.83	0.69	0.51	0.40	
	3 3/4		1.00	0.83	0.61	0.49	0.40
	4 1/2			1.00	0.74	0.59	0.49
	6				1.00	0.79	0.66
7 1/2					1.00	0.83	
9						1.00	

Notes: For anchors loaded in shear, the critical edge distance (c_{cr}) is equal to 12 anchor diameters ($12d$) at which the anchor achieves 100% of load. Minimum edge distance (c_{min}) is equal to 5 anchor diameters ($5d$) at which the anchor achieves 40% of load.



ORDERING INFORMATION

Hex Nut Lok-Bolt

Catalog Number		Size	Bolt Length	Drill Diameter	Minimum Embed.	Standard Box	Standard Carton	Wt./ 100
Carbon	Stainless							
5005	–	5/16" x 1-1/2"	1 13/16"	5/16"	1 3/8"	100	1,000	4 1/4
5010	–	5/16" x 2 1/2"	2 11/16"	5/16"	1 1/2"	100	500	5 3/4
5015	6152	3/8" x 1 7/8"	2 3/16"	3/8"	1 5/8"	50	500	7
5020	6153	3/8" x 3"	3 5/16"	3/8"	1 5/8"	50	500	10
5022	–	3/8" x 4"	4 5/16"	3/8"	1 5/8"	50	500	16
5025	6156	1/2" x 2 1/4"	2 7/8"	1/2"	2 1/8"	25	250	14
5030	6157	1/2" x 3"	3 3/8"	1/2"	2 1/4"	25	250	17 1/4
5034	6160	1/2" x 4"	4 3/8"	1/2"	2 1/4"	25	125	22
5033	–	1/2" x 5 1/4"	6 1/8"	1/2"	2 1/4"	25	125	27
5032	–	1/2" x 6"	6 3/4"	1/2"	2 1/4"	10	100	35
5035	–	5/8" x 2 1/4"	3 3/16"	5/8"	2 1/8"	25	125	25 1/2
5038	–	5/8" x 3"	3 3/4"	5/8"	2 3/4"	25	125	34
5040	6164	5/8" x 4 1/4"	5"	5/8"	2 3/4"	10	100	41
5045	–	5/8" x 6"	6 1/4"	5/8"	2 3/4"	10	100	49
5050	–	3/4" x 2 1/2"	3 5/8"	3/4"	2 1/8"	10	100	46
5055	6168	3/4" x 4"	5 1/8"	3/4"	3 3/8"	10	40	70
5060	–	3/4" x 5 3/4"	7 1/8"	3/4"	3 3/8"	10	30	90
5065	–	3/4" x 7 1/2"	9"	3/4"	3 3/8"	10	30	115

The published minimum length is measured from below the washer to the end of the anchor. Actual anchor lengths may be slightly longer.



Acorn Nut Lok-Bolt

Catalog Number		Size	Bolt Length	Drill Diameter	Minimum Embed.	Standard Box	Standard Carton	Wt./ 100
Carbon	Stainless							
*5125	–	1/4" x 5/8"	1 1/32"	1/4"	1/2"	100	1,000	2
5150	6150	1/4" x 1 3/8"	1 21/32"	1/4"	1 1/8"	100	1,000	2 3/4
5175	–	1/4" x 2 1/4"	2 9/16"	1/4"	1 1/8"	100	1,000	3 1/4

The published minimum length is measured from below the washer to the end of the anchor. Actual anchor lengths may be slightly longer.

*This size does not have a compression ring.



Round Head Lok-Bolt, Slotted

Catalog Number		Size	Drill Diameter	Minimum Embed.	Standard Box	Standard Carton	Wt./ 100
Carbon	Stainless						
*5205	–	1/4" x 1 1/8"	5/16"	1 3/8"	100	1,000	4 1/4
5210	6180	1/4" x 2"	5/16"	1 1/2"	100	500	5 3/4
5215	–	1/4" x 2 3/4"	3/8"	1 5/8"	50	500	7
5225	–	5/16" x 2 3/8"	3/8"	1 5/8"	50	500	16
5230	–	5/16" x 3 3/8"	1/2"	2 1/8"	25	250	14
5235	–	3/8" x 2 1/2"	1/2"	2 1/4"	25	250	17 1/4
5240	–	3/8" x 3 3/4"	1/2"	2 1/4"	25	125	22

The published length is measured from below the head to the end of the anchor.

*This size does not have a compression ring.



ORDERING INFORMATION

Combo Flat Head Lok-Bolt

Catalog Number		Size	Drill Diameter	Minimum Embed.	Standard Box	Standard Carton	Wt./ 100
Carbon	Stainless						
5305	–	1/4" x 1 1/8"	1/4"	1"	100	1,000	2
5310	6170	1/4" x 2"	1/4"	1 1/8"	100	1,000	2 3/4
5315	6172	1/4" x 3"	1/4"	1 1/8"	100	1,000	3 3/4
5320	–	1/4" x 4"	1/4"	1 1/8"	100	500	4 1/2
5325	–	1/4" x 5 1/4"	1/4"	1 1/8"	100	500	6 1/2
5330	–	5/16" x 2 1/2"	5/16"	1 1/2"	100	1,000	4 1/2
5340	–	3/8" x 2 3/4"	3/8"	1 5/8"	50	500	7 1/2
5345	6174	3/8" x 4"	3/8"	1 5/8"	50	250	10 3/4
5350	6175	3/8" x 5"	3/8"	1 5/8"	50	250	14
5360	6176	3/8" x 6"	3/8"	1 5/8"	50	250	16

The published length is the minimum overall length of the anchor. Combo Flat Head Lok-Bolts do not have a compression ring.



Threshold Flat Head Lok-Bolt, Slotted

Catalog Number		Size	Drill Diameter	Minimum Embed.	Standard Box	Standard Carton	Wt./ 100
Carbon	Stainless						
5500	–	1/4" x 2"	1/4"	1 1/8"	100	1,000	2 1/2

The published length is the minimum overall length of the anchor. Threshold Flat Head Lok-Bolts do not have a compression ring.



Rod Hanger Lok-Bolt

Catalog Number		Size	Drill Diameter	Minimum Embed.	Standard Box	Standard Carton	Wt./ 100
Carbon	Stainless						
5810	–	1/4" x 1 1/2"	5/16"	1 1/2"	50	250	5 1/2
5815	–	3/8" x 1 7/8"	3/8"	1 5/8"	50	250	9
5825	–	1/2" x 2 1/4"	1/2"	2 1/4"	25	125	21

The published length is measured from below the washer to the end of the anchor. Rod Hanger Lok-Bolts do not have a compression ring.



Tie-Wire Lok-Bolt

Catalog Number		Size	Drill Diameter	Minimum Embed.	Standard Box	Standard Carton	Wt./ 100
Carbon	Stainless						
5700	–	5/16" x 1 1/2"	5/16"	1 1/2"	100	1,000	5 1/4

The published length is measured from below the head to the end of the anchor.



Lok-Bolt Multiple Use Kit

Catalog Number		Size	Drill Diameter	Minimum Embed.	Standard Box	Standard Carton	Wt./ 100
Carbon	Stainless						
5660	–	1/2"	1/2"	2 1/4"	25	250	10

Multiple use kits contain expansion sleeves, expansion cones, nuts, and washers for use with 3/8" diameter rod.

Lok-Bolt Extenders

Catalog Number		Size	Drill Diameter	Minimum Embed.	Standard Box	Standard Carton	Wt./ 100
Carbon	Stainless						
5680	5687	1/4" x 1"	1/4"	1 1/8"	100	1,000	3
5681	–	5/16" x 1 1/8"	5/16"	1 1/2"	100	1,000	3
5684	5689	3/8" x 1"	3/8"	1 5/8"	50	500	3
5685	5690	1/2" x 1 3/8"	1/2"	2 1/4"	25	125	3

Extenders are used for added length on all head styles.

