
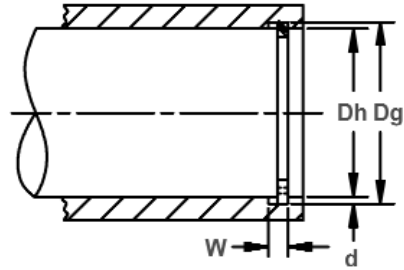



C KL Spiral Housing Rings




Internal, Light Duty
 These single-turn retaining rings are ideal for light-duty applications, or where axial positioning is the primary function.



Free Diameter & Ring Measurements

Housing Diameter & Groove Dimensions

RING NO.	HOUSING DIAMETER	GROOVE SIZE					RING SIZE						THRUST LOAD (lbs.)		
		DIAMETER		WIDTH		DEPTH	FREE DIAMETER			THICKNESS		SECTION		RING Safety factor of 3	GROOVE Safety factor of 2
		(In.)	Dg	Tol.	W	Tol.	d	Df	Tol.	T	Tol.	S	Tol.		
KL-50	.500	.528		.022		.014	.531		.018		.045		1300	500	
KL-56	.562	.590	+ .002	.022		.014	.593		.018		.045		1460	560	
KL-62	.625	.653	- .002	.022		.014	.656		.018		.045		1630	620	
KL-68	.687	.715		.022		.014	.719	+ .013	.018		.045		1790	680	
KL-75	.750	.779		.022		.015	.783	- .000	.018		.045		1950	800	
KL-81	.812	.854		.026		.021	.862		.021		.065		2460	1210	
KL-87	.875	.917	+ .003	.026	+ .002	.021	.926		.021	+ .0015	.065		2660	1300	
KL-93	.937	.979	- .003	.026	- .000	.021	.989		.021	- .0015	.065		2840	1390	
KL-100	1.000	1.042		.026		.021	1.052		.021		.065		3040	1480	
KL-106	1.062	1.106		.031		.022	1.117		.025		.088		3500	1650	
KL-112	1.125	1.169		.031		.022	1.180		.025		.088		3710	1750	
KL-118	1.187	1.231		.031		.022	1.242		.025		.088		3920	1850	
KL-125	1.250	1.294	+ .004	.031		.022	1.307	+ .015	.025		.088		4120	1940	
KL-131	1.312	1.356	- .004	.031		.022	1.369	- .000	.025		.088		4330	2040	
KL-137	1.375	1.419		.031		.022	1.433		.025		.088		4540	2140	
KL-143	1.437	1.481		.031		.022	1.496		.025		.088		4740	2240	
KL-150	1.500	1.544		.031		.022	1.559		.025		.088		4950	2330	
KL-156	1.562	1.619		.039		.029	1.637		.031		.118	+ .004	6390	3200	
KL-162	1.625	1.682		.039		.029	1.701		.031		.118	- .004	6650	3330	
KL-168	1.687	1.744		.039		.029	1.763		.031		.118		6900	3460	
KL-175	1.750	1.807	+ .005	.039		.029	1.827	+ .020	.031		.118		7160	3590	
KL-181	1.812	1.869	- .005	.039		.029	1.890	- .000	.031		.118		7410	3710	
KL-187	1.875	1.932		.039		.029	1.953		.031		.118		7670	3840	
KL-193	1.937	1.994		.039		.029	2.016		.031		.118		7920	3970	
KL-200	2.000	2.057		.039		.029	2.079		.031		.118		8180	4100	
KL-206	2.062	2.138		.039		.038	2.162		.031		.158		8430	5540	
KL-212	2.125	2.201		.039	+ .003	.038	2.226		.031	+ .002	.158		8690	5710	
KL-218	2.187	2.263	- .000	.039	- .000	.038	2.289		.031	- .002	.158		8950	5870	
KL-225	2.250	2.326		.039		.038	2.352		.031		.158		9200	6040	
KL-231	2.312	2.388		.039		.038	2.415		.031		.158		9460	6210	
KL-237	2.375	2.451		.039		.038	2.478		.031		.158		9720	6380	
KL-243	2.437	2.513	+ .006	.039		.038	2.541	+ .025	.031		.158		9970	6550	
KL-250	2.500	2.576	- .006	.039		.038	2.605	- .000	.031		.158		10230	6720	
KL-256	2.562	2.638		.039		.038	2.667		.031		.158		10480	6880	
KL-262	2.625	2.701		.039		.038	2.731		.031		.158		10740	7050	
KL-268	2.687	2.763		.039		.038	2.794		.031		.158		10990	7220	
KL-275	2.750	2.826		.039		.038	2.857		.031		.158		11250	7390	
KL-281	2.812	2.888		.039		.038	2.920		.031		.158		11500	7550	
KL-287	2.875	2.951		.039		.038	2.983		.031		.158		11760	7720	
KL-293	2.937	3.013		.039		.038	3.046		.031		.158		12010	7890	
KL-300	3.000	3.076		.039		.038	3.110		.031		.158		12270	8060	

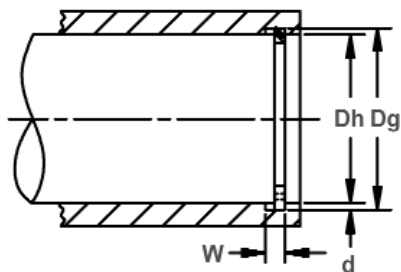

Free Diameter & Ring Measurements

Housing Diameter & Groove Dimensions

RING NO.	HOUSING DIAMETER	GROOVE SIZE					RING SIZE					THRUST LOAD (lbs.)		
		DIAMETER		WIDTH		DEPTH	FREE DIAMETER		THICKNESS		SECTION		RING Safety factor of 3	GROOVE Safety factor of 2
		(In.)	Dg	Tol.	W	Tol.	d	Df	Tol.	T	Tol.	S	Tol.	
KL-306	3.062	3.154	+.006 -.006	.044	+.003 -.000	.046	3.188	+.030 -.000	.039	+.002 -.002	.188	+.005 -.005	15760	9960
KL-312	3.125	3.217		.044		.046	3.251		.039		.188		16080	10160
KL-318	3.187	3.279		.044		.046	3.314		.039		.188		16400	10360
KL-325	3.250	3.342		.044		.046	3.377		.039		.188		16720	10570
KL-331	3.312	3.404		.044		.046	3.440		.039		.188		17040	10770
KL-337	3.375	3.467		.044		.046	3.504		.039		.188		17370	10970
KL-343	3.437	3.529		.044		.046	3.566		.039		.188		17690	11180
KL-350	3.500	3.592		.044		.046	3.630		.039		.188		18010	11380
KL-356	3.562	3.654		.044		.046	3.692		.039		.188		18330	11580
KL-362	3.625	3.717		.044		.046	3.756		.039		.188		18650	11790
KL-368	3.687	3.779	.044	.046	3.819	.039	.188	18970	11990					
KL-375	3.750	3.842	.044	.046	3.882	.039	.188	19300	12190					
KL-381	3.812	3.904	.044	.046	3.945	.039	.188	19620	12400					
KL-387	3.875	3.967	.044	.046	4.009	.039	.188	19940	12600					
KL-393	3.937	4.029	.044	.046	4.071	.039	.188	20260	12800					
KL-400	4.000	4.092	.044	.046	4.135	.039	.188	20580	13010					
KL-412	4.125	4.235	+.007 -.007	.052	+.004 -.000	.055	4.279	+.045 -.000	.046	+.060 -.000	.225	+.004 -.008	23850	16040
KL-425	4.250	4.360		.052		.055	4.405		.046		.225		24570	16520
KL-437	4.375	4.485		.052		.055	4.531		.046		.225		25290	17010
KL-450	4.500	4.610		.052		.055	4.658		.046		.225		26010	17500
KL-462	4.625	4.735		.052		.055	4.784		.046		.225		26740	17980
KL-475	4.750	4.860		.052		.055	4.910		.046		.225		27460	18470
KL-487	4.875	4.985		.052		.055	5.036		.046		.225		28180	18950
KL-500	5.000	5.110		.052		.055	5.163		.046		.225		28900	19440
KL-525	5.250	5.381		.067		.066	5.435		.061		.225		40240	24490
KL-550	5.500	5.638		.067		.069	5.694		.061		.225		42160	26830
KL-575	5.750	5.894	.067	.072	5.953	.061	.225	44080	29260					
KL-600	6.000	6.150	.067	.075	6.212	.061	.265	45990	31810					
KL-625	6.250	6.406	.067	.078	6.470	.061	.265	47910	34460					
KL-650	6.500	6.663	.067	.082	6.730	.061	.265	49830	37680					
KL-675	6.750	6.919	.067	.085	6.988	.061	.265	51740	40560					
KL-700	7.000	7.175	.067	.088	7.247	.061	.265	53660	43540					
KL-725	7.250	7.431	.067	.091	7.505	.061	.265	55580	46640					
KL-750	7.500	7.688	.067	.094	7.765	.061	.265	57490	49830					
KL-775	7.750	7.944	+.008 -.008	.067	+.005 -.000	.097	8.023	+.070 -.000	.061	+.004 -.008	.300	+.004 -.008	59410	53140
KL-800	8.000	8.200		.067		.100	8.282		.061		.300		61320	56500
KL-825	8.250	8.456		.067		.103	8.541		.061		.300		63240	60000
KL-850	8.500	8.713		.067		.107	8.800		.061		.300		65160	64290
KL-875	8.750	8.969		.082		.110	9.059		.076		.345		83570	68040
KL-900	9.000	9.225		.082		.113	9.317		.076		.345		85950	71890
KL-925	9.250	9.481		.082		.116	9.576		.076		.345		88340	75850
KL-950	9.500	9.738		.082		.119	9.835		.076		.345		90730	79910
KL-975	9.750	9.994		.082		.122	10.094		.076		.345		93120	84080
KL-1000	10.000	10.250		.082		.125	10.353		.076		.345		95500	88360